

Adept Cobra™ i800



Specifications

Reach	800 mm
Payload (max)	2 kg (rated) 5.5 kg (max)
Joint 4 inertia (max)	450 kg-cm ²
Downward Push Force	30 kgf
Adept Cycle	
Burst Mode	0.54 sec (2 kg)
Sustained	0.54 sec (2 kg)
Joint Range	
Joint 1	± 105°
Joint 2	± 157.5°
Joint 3	210 mm
Joint 4	± 360°
Joint Speeds	
Joint 1	386°/sec
Joint 2	720°/sec
Joint 3	1100 mm/sec
Joint 4	1200°/sec
Repeatability	
XY	± 0.017 mm
Z	± 0.003 mm
Theta	± 0.019°
Pass-Through User Connections	
Electrical	24 (12 twisted pairs)
Pneumatic	6 mm (x2) 4 mm (x3)
DeviceNet	
Digital I/O Channels	12 inputs 8 outputs (included)
Weight	43 kg
Environmental Requirements	
Ambient temperature	5 - 40 °C
Humidity range	5 - 90 % (non condensing)
CE and UL compliant	

The Adept Cobra i800 is an extended reach version of the Adept Cobra i600 robot, offering the same payload and performance at an affordable price. It is designed for mechanical assembly, material handling, packaging, machine tending, screwdriving, and many other operations requiring fast and precise automation.

With no external electronics, the Adept Cobra i-series is the only line of self-contained, standalone SCARA robots. The amplifiers and motion controller are built into the robot, making the Adept Cobra i800 one of the easiest robots to design into workcells where space is critical.

Installation is easy. Simply supply power, attach the emergency stop, and plug in digital I/O cables to interface to other peripherals. Add tooling and vacuum lines, then connect a PC directly to the robot, and program the arm using the simple, yet powerful, MicroV+™ robot language. The PC can be removed for runtime.


Product Features and Benefits

- No external electronics - the amplifiers and motion controller are built into the robot arm, significantly reducing the size and number of cables, which dramatically simplifies system installation
- MicroV+™ real-time operating system and easy-to-use programming language

- Absolute encoders make for easy calibration
- High-resolution encoders provide high-precision and superior slow-speed following
- High-efficiency motors deliver high performance with more torque per amp
- Low-inertia harmonic drives provide maximum acceleration
- Temperature sensors on the motors and amplifiers maximize performance and reliability
- 8 kHz servo update for improved path following and control
- AdeptDesktop software on CD for programming
- Integrated temperature sensors monitor heat in servo motors to prevent damage
- Diagnostics display on robot enables faster troubleshooting
- Easy replacement of electronic sub-assembly reduces MTTR

Adept Cobra™ i800


Dimensions Adept Cobra i800 (mm)

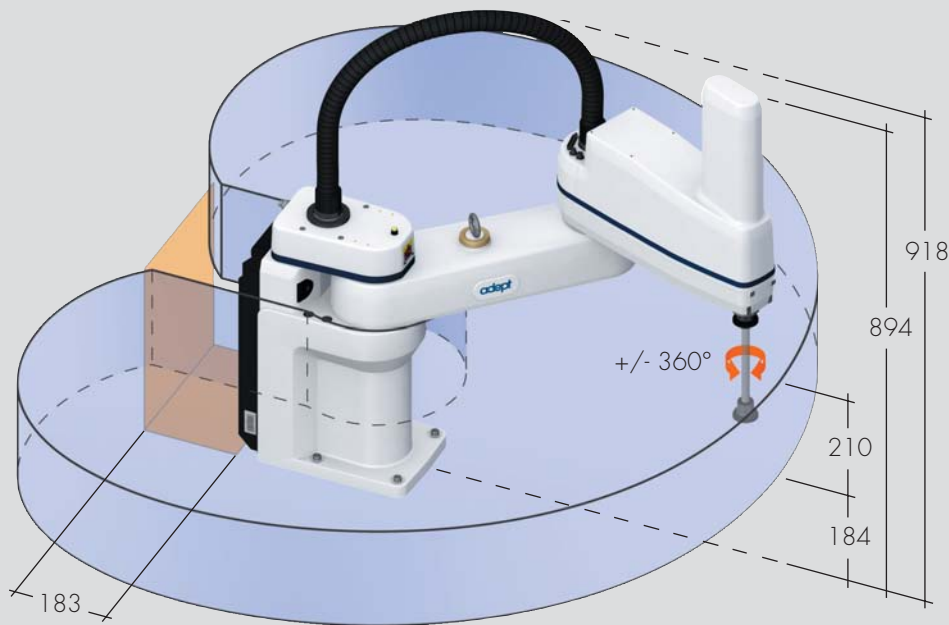


- Work Envelope: Radius 800 mm
Inner Limit: Radius 164 mm
Height: 210 mm

- Required clearance to open AIB Chassis

Dimensions Flange (mm)

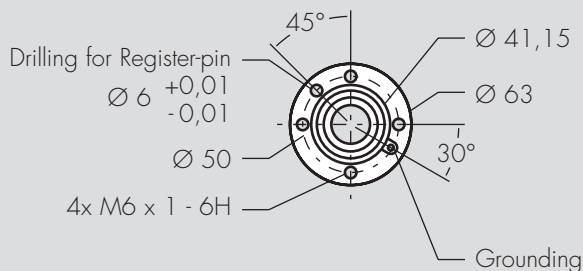

Dimensions foot plate (mm)



The Adept Cobra i800 system includes the following:

- Adept Cobra i800 Robot with MicroV+ installed
- Front Panel with E-Stop
- Adept DeskTop 2.0 software on CD-ROM
- RS-232 Null Modem Cable
- XPANEL Cable (for connecting E-Stop, Front Panel and MCP)
- User Documentation

Optional Peripherals:

- T1 Pendant
- IO Blox (8 digital input & 8 digital output channels)
- Hardstop kit
- IP65 option
- Solenoid kit

Downloads:

- Download CAD files from www.adept.com using the following download ID:
Adept Cobra i800 Robot 500008



Adept Technology, Inc. 3011 Triad Drive, Livermore, CA 94551

Tel: 925-245-3400 Fax: 925-960-0452 Email: info@adept.com

www.adept.com

Specifications subject to change without notice.

©2007 Adept Technology, Inc. All rights reserved. Adept and the Adept logo are registered trademarks, and the Adept Cobra is a trademark of Adept Technology, Inc. All other trademarks are the property of their respective holders. AC800DS0707