

IRB 910INV

Ceiling-mounted SCARA increases assembly flexibility



Fast, cost-effective and, because it's from ABB, accurate. The ceiling-mounted SCARA offers space savings and increased assembly flexibility.

Ceiling-mounted SCARA increases the working area

ABB's new ceiling-mounted IRB 910INV robot is designed to increase the space efficiency and flexibility of each cell and support the performance of complex tasks even in confined spaces. By mounting the IRB 910INV on the ceiling, manufacturers can increase the space efficiency and flexibility of each cell and do more complex tasks even in confined spaces. Moreover, the IRB 910INV robot can collaborate with other robots and machines, substantially boosting productivity.

Best-in-class motion control for faster cycle times

Powered by an ABB OmniCore™ controller, the IRB 910INV robot offers the best-in-class motion control for repeatable point-to-point accuracy during pick-and-place, assembly, and testing applications. This includes electronics small parts assembly tasks such as screw driving, component inserting or mounting, and automated quality control inspections.

The IRB 910INV cleanroom option is coming later. Moreover, the compact and light-weight robot is available in two variants – one with a maximum payload of 3 kg and a 350 mm reach, and one with a maximum payload of 6 kg and a 550 mm reach.

Delivers excellent performance and comprehensive functionalities

When designing the IRB 910INV robot, ABB wanted to emphasize speed and accuracy. Although small in size, the ceiling-mounted IRB 910INV robot offers the same high performance and functionalities as other ABB small robots, specifically, superior path control, accuracy, and a small footprint.

Key Benefits

- Ceiling-mounted SCARA offers space savings and increased flexibility
- Class-leading repeatable accuracy with ABB's superior motion control
- Fast cycle times for increased throughput and productivity
- Equipped with up to 16 I/O for more sophisticated/complex applications

Main applications

- Assembly & Testing
- Material handling
- Picking & Placing
- Screw driving
- Rubber insertion



01



02

01
OmniCore™
Controller and
FlexPendant

02
IRB 910INV

Specification

Robot version	Reach (m)	Payload (kg)	Armload (kg)
IRB 910INV-3/0.35	0.35	3	-
IRB 910INV-6/0.55	0.55	6	-
Number of axes	4		
Protection	IP30		
Mounting	Inverted		
Controller	OmniCore		
Integrated signal and power supply	8 signals on wrist ¹		
Integrated air supply	4 air on outer arm (5 Bar) ¹		
Integrated ethernet	1 Gbit/s port ¹		

¹Optional

Performance (according to ISO 9283)

1 kg picking cycle	
IRB 910Inv-3/0.35 25 x 300 x 25 mm	0.35 s
IRB 910Inv-6/0.55 25 x 300 x 25 mm	0.40 s

Technical information



Physical

Dimensions robot base	200 x 200 mm
Weight IRB 910INV-3/0.35	19 kg
Weight IRB 910INV-6/0.55	22 kg

Movement, IRB 910INV-3/0.35

Axis movement	Working range	Axis max speed
Axis 1	-225° to 225°	672°/s
Axis 2	-225° to 225°	748°/s
Axis 3	-140 mm to 0 mm	1.1m/s
Axis 4	-720° to 720°	3000°/s

IRB 910INV-3/0.35 and IRB 910INV-6/0.55, working range

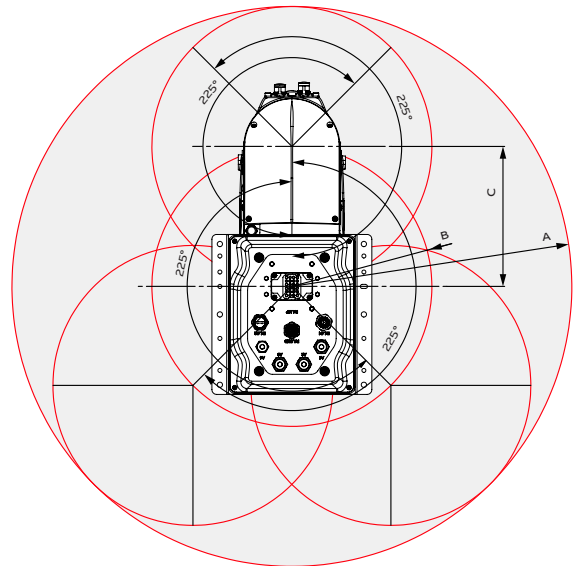

	IRB 910INV-3/0.35	IRB 910INV-6/0.55
A (mm)	R350	R550
B (mm)	R175	R275
C (mm)	175	275
D (mm)	140	190

Movement, IRB 910INV-6/0.55

Axis movement	Working range	Axis max speed
Axis 1	-225° to 225°	420°/s
Axis 2	-225° to 225°	780°/s
Axis 3	-190 mm to 0 mm	1.1m/s
Axis 4	-720° to 720°	3000°/s