

IRB 910SC

SCARA



The IRB 910SC (SCARA) is fast, cost-effective and, because it's from ABB, accurate. In designing its Selective Compliance Articulated Robot Arm (SCARA), or IRB 910SC, ABB has delivered a single arm robot capable of operating in a confined footprint. ABB's SCARA is ideal for the Small Parts Assembly, Material Handling and parts inspection.

Variants

With a maximum payload of 6 kg, the IRB 910SC is available in three configurations (IRB 910SC – 3/0.45, IRB 910SC – 3/0.55m, and IRB 910SC – 3/0.65.).

All are modular by design, with different linking arm lengths and have individual reaches of 450 mm, 550 mm and 650 mm, respectively.

All members of the SCARA family are tabletop mountable. IP20 and clean room options are under development.

Applications

ABB's SCARA family is designed for a variety of general-purpose applications such as tray kitting, component placement, machine loading/unloading and assembly.

These applications require fast, repeatable and articulate point-to-point movements such as palletizing, depalletizing, machine loading/unloading and assembly.

ABB's SCARA family is ideal for customers requiring rapid cycle times, high precision and high reliability for their Small Part Assembly applications and for laboratory automation and prescription drug dispensing.

Features

- A Clean Room ISO-5 option is under development
- IP20 protection is under development
- Table top mountable
- Ease of integration
- Custom interfaces
- Modular design

Customer benefits

- Short cycle times which achieved by high speed
- High precision which is achieved by superior motion control
- Superb reliability due to reuse and standard proven components.

Specification

Robot version IRB	Reach (m)	Payload (kg)	Armload
IRB 910SC-3/0.45	0.45	Rated: 3 Max: 6	Included in the max payload
IRB 910SC-3/0.55	0.55	Rated: 3 Max: 6	Included in the max payload
IRB 910SC-3/0.65	0.65	Rated: 3 Max: 6	Included in the max payload
Protection	IP20		
Mounting	Table		
Controller	IRC5 Compact		

Technical information

Electrical Connections

Supply voltage	200-600 V, 50/60Hz
Transformer rating	3.0 kVA
Power consumption	220 W

Physical

Footprint	160mm x160mm
Weight	
IRB 910SC -3/0.45	24.5 kg
IRB 910SC -3/0.55	25 kg
IRB 910SC -3/0.65	25.5 kg


Features

Integrated signal supply	10 signals on wrist
Integrated air supply	4 air on wrist (5 bar)


Performance (according to ISO 9283)

	IRB 910SC -3/0.45	IRB 910SC -3/0.55	IRB 910SC -3/0.65
1 kg picking cycle	0.380 s	0.370 s	0.385 s
Max TCP Velocity	6.2 m/s	6.9 m/s	7.6 m/s
Max TCP Acceleration	65 m/s ²	60 m/s ²	55 m/s ²
Acceleration time 0-1m/s	0.04 s	0.05 s	0.06 s
Axis 3 (Z stroke) down force	250 N	250 N	250 N
Maximum Speed			
Axis 1+ Axis 2	6.13 m/s	6.86 m/s	7.58 m/s
Axis 3	1.02 m/s	1.02 m/s	1.02 m/s
Axis 4	2400 °/s	2400 °/s	2400 °/s
Position Repeatability			
Axis 1 + Axis 2	±0.015 mm	±0.015 mm	±0.015 mm
Axis 3	±0.01 mm	±0.01 mm	±0.01 mm
Axis 4	±0.005°	±0.005°	±0.005°

IRB 910SC-3/0.45, working range

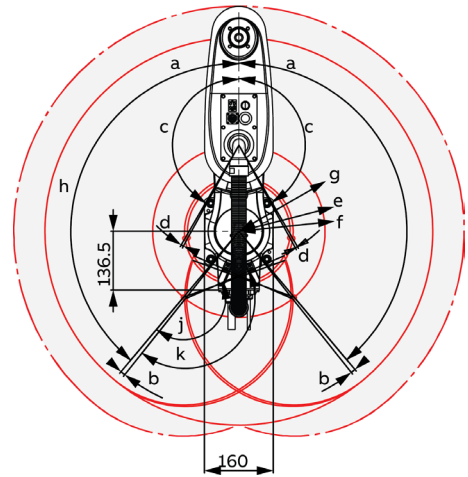

IRB 910SC-3/0.55, working range

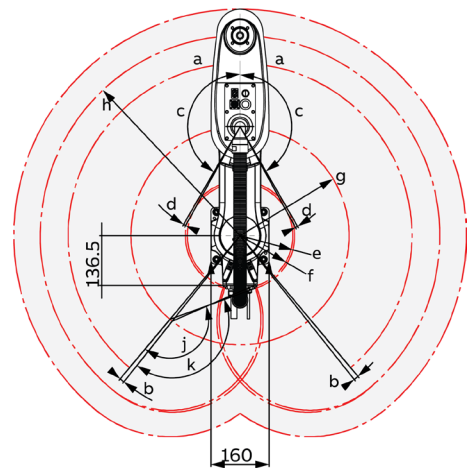

IRB 910SC-3/0.65, working range

